



CST3401 P-Ch 30V Fast Switching MOSFETs

- ★ Green Device Available
- ★ Super Low Gate Charge
- ★ Excellent CdV/dt effect decline
- ★ Advanced high cell density Trench technology

CST3401 Product Summary




BVDSS	RDSON	ID
-30V	48mΩ	-4A

CST3401 Description

The CST3401 is the high cell density trenched P-ch MOSFETs, which provides excellent RDSON and efficiency for most of the small power switching and load switch applications.

The CST3401 meet the RoHS and Green Product requirement with full function reliability approved.

CST3401 SOT23 Pin Configuration

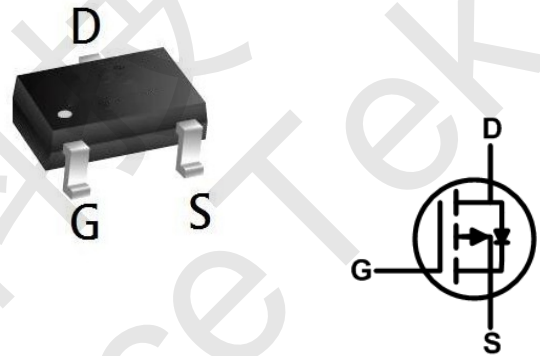

CST3401 Absolute Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Symbol	Parameter	Value	Units
V _{DS}	Drain-to-Source Voltage	-30	V
V _{GS}	Gate-to-Source Voltage	±12	V
I _D	Continuous Drain Current	T _A = 25°C	-4
		T _A = 100°C	-3
I _{DM}	Pulsed Drain Current ⁽¹⁾	-16	A
P _D	Power Dissipation	T _A = 25°C	1.2
R _{θJA}	Thermal Resistance, Junction to Ambient ⁽²⁾	108	°C/W
T _J , T _{STG}	Junction & Storage Temperature Range	-55 to 150	°C



CST3401 P-Ch 30V Fast Switching MOSFETs

CST3401 Electrical Characteristics ($T_J = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
Off Characteristics						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$I_D = -250\mu\text{A}, V_{GS} = 0\text{V}$	-30	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = -30\text{V}, V_{GS} = 0\text{V}$	-	-	1.0	μA
I_{GSS}	Gate-Body Leakage Current	$V_{DS} = 0\text{V}, V_{GS} = \pm 12\text{V}$	-	-	± 100	nA
On Characteristics						
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = -250\mu\text{A}$	-0.6	-0.95	-1.3	V
$R_{DS(ON)}$	Static Drain-Source ON-Resistance ⁽³⁾	$V_{GS} = -10\text{V}, I_D = -4\text{A}$	-	48	62	$\text{m}\Omega$
		$V_{GS} = -4.5\text{V}, I_D = -3\text{A}$	-	56	73	$\text{m}\Omega$
		$V_{GS} = -2.5\text{V}, I_D = -3\text{A}$	-	75	98	$\text{m}\Omega$
Dynamic Characteristics						
C_{iss}	Input Capacitance	$V_{GS} = 0\text{V}, V_{DS} = -15\text{V}, f = 1\text{MHz}$	-	553	-	pF
C_{oss}	Output Capacitance		-	57	-	pF
C_{rss}	Reverse Transfer Capacitance		-	35	-	pF
Q_g	Total Gate Charge	$V_{GS} = 0 \text{ to } -4.5\text{V}$ $V_{DS} = -15\text{V}, I_D = -3\text{A}$	-	6.5	-	nC
Q_{gs}	Gate Source Charge		-	1.4	-	nC
Q_{gd}	Gate Drain("Miller") Charge		-	1.7	-	nC
Switching Characteristics						
$t_{d(on)}$	Turn-On DelayTime	$V_{GS} = -4.5\text{V}, V_{DD} = -15\text{V}$ $I_D = -3\text{A}, R_{GEN} = 3\Omega$	-	10	-	ns
t_r	Turn-On Rise Time		-	86	-	ns
$t_{d(off)}$	Turn-Off DelayTime		-	150	-	ns
t_f	Turn-Off Fall Time		-	357	-	ns
Drain-Source Diode Characteristics and Max Ratings						
I_S	Maximum Continuous Drain to Source Diode Forward Current		-	-	-4	A
I_{SM}	Maximum Pulsed Drain to Source Diode Forward Current		-	-	-16	A
V_{SD}	Drain to Source Diode Forward Voltage	$V_{GS} = 0\text{V}, I_S = -4\text{A}$	-	-	-1.2	V
t_{rr}	Body Diode Reverse Recovery Time	$I_F = -3\text{A}, di/dt = 80\text{A}/\mu\text{s}$	-	36	-	ns
Q_{rr}	Body Diode Reverse Recovery Charge		-	5	-	nC

- Notes:
1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature.
 2. $R_{\theta JA}$ is measured with the device mounted on a 1inch² pad of 2oz copper FR4 PCB
 3. Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 0.5\%$.



CST3401 Typical Performance Characteristics

Figure 1: Output Characteristics

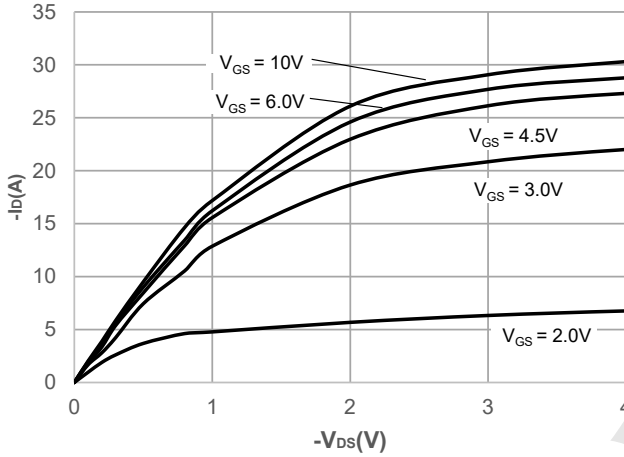


Figure 2: Typical Transfer Characteristics

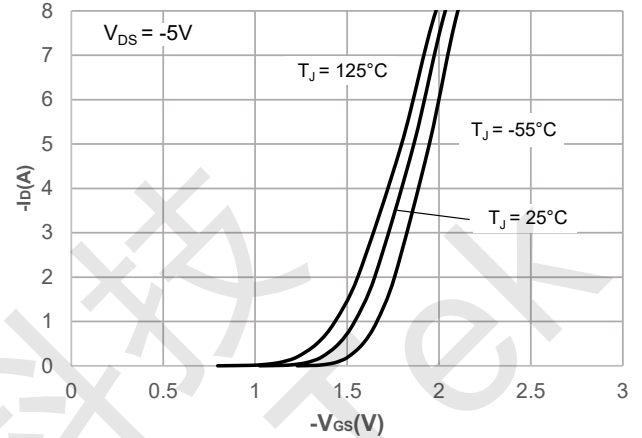


Figure 3: On-resistance vs. Drain Current

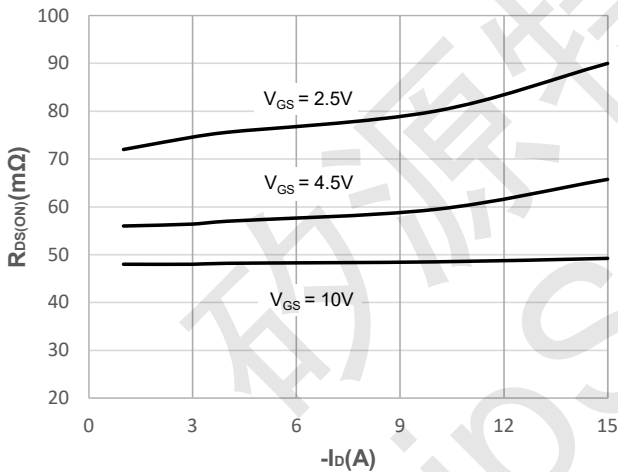


Figure 4: Body Diode Characteristics

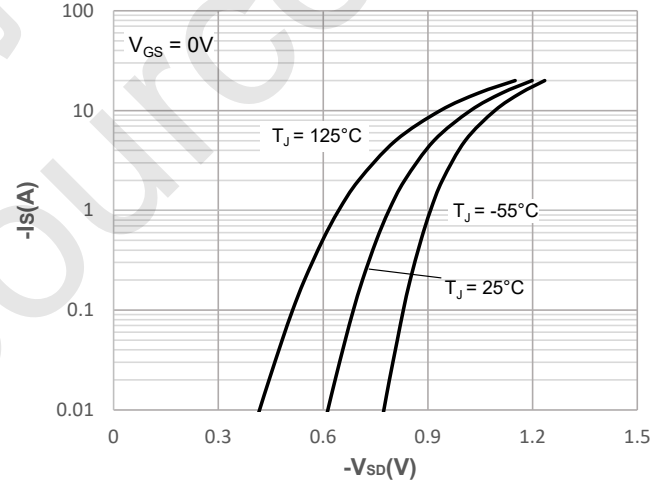


Figure 5: Gate Charge Characteristics


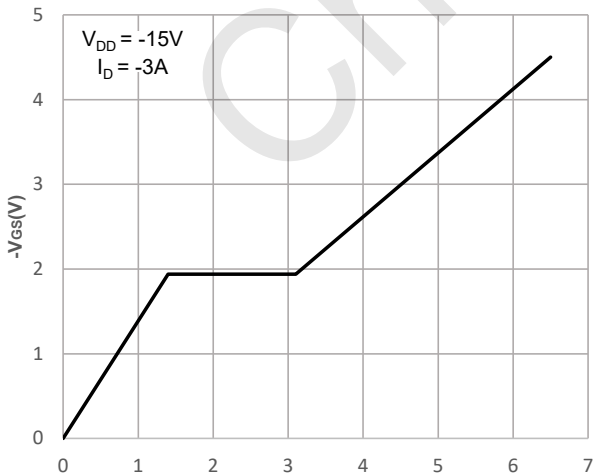


Figure 6: Capacitance Characteristics



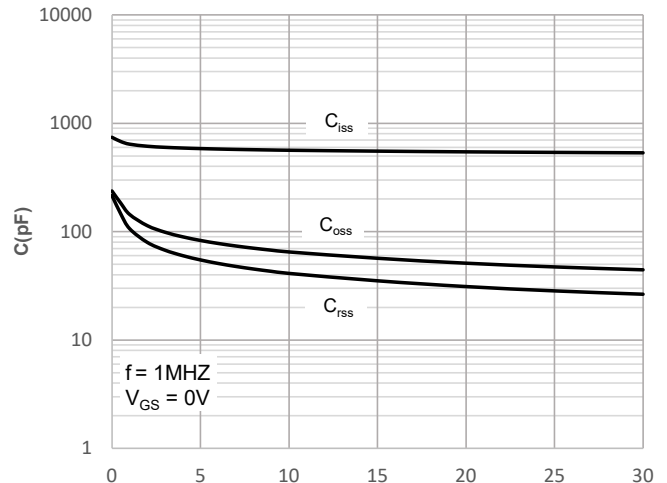

CST3401 P-Ch 30V Fast Switching MOSFETs

CST3401 Typical Performance Characteristics

Figure 7: Normalized Breakdown voltage vs. Junction Temperature

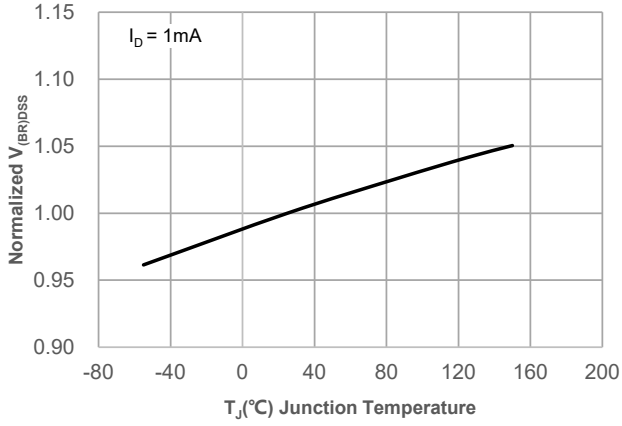


Figure 8: Normalized on Resistance vs. Junction Temperature

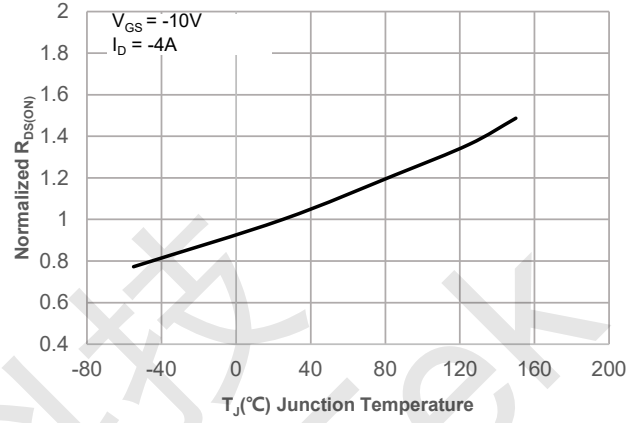


Figure 9: Maximum Safe Operating Area

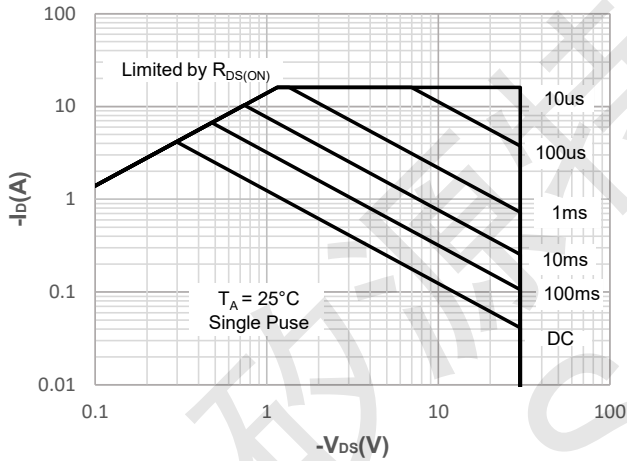


Figure 10: Maximum Continuous Drianc Current vs. Ambient Temperature

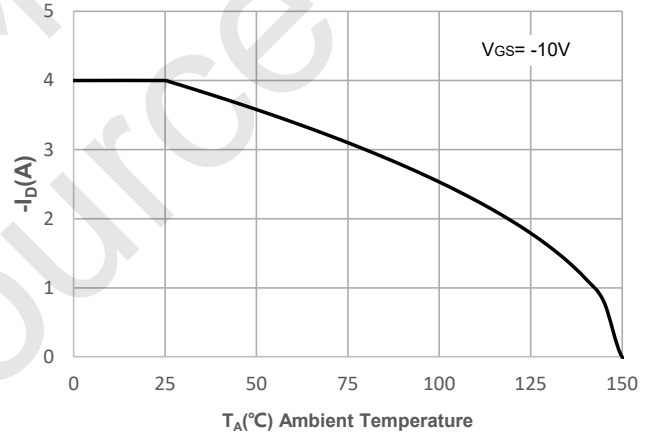


Figure 11: Normalized Maximum Transient Thermal Impedance


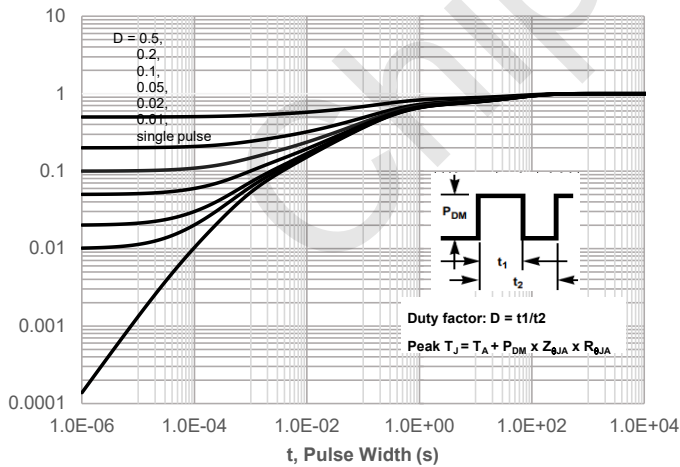


Figure 12: Peak Current Capacity



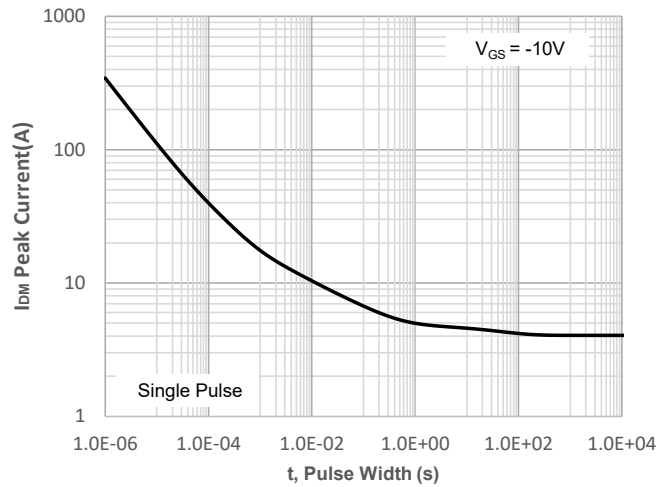

CST3401 Test Circuit

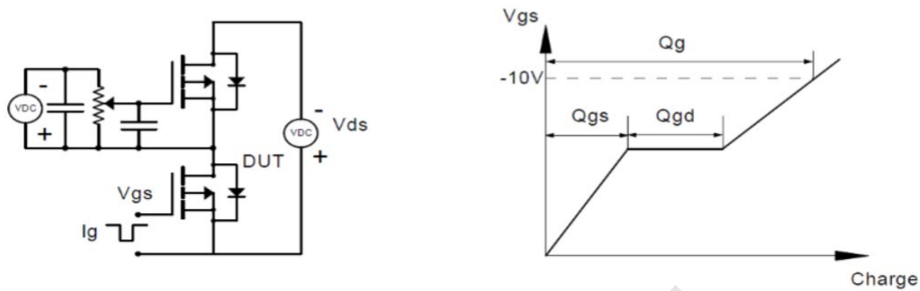


Figure 1: Gate Charge Test Circuit & Waveform

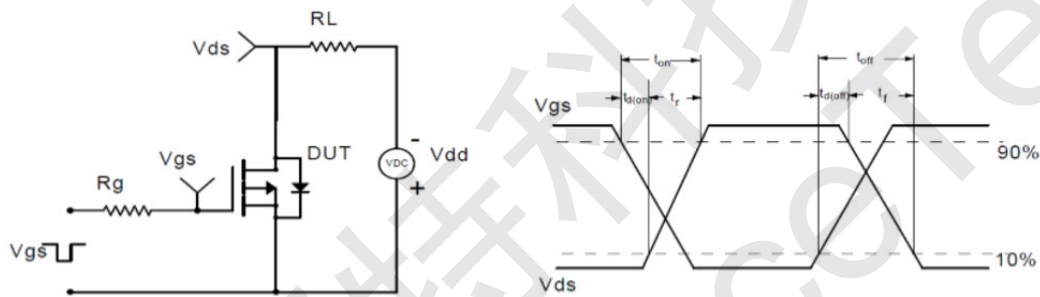


Figure 2: Resistive Switching Test Circuit & Waveform

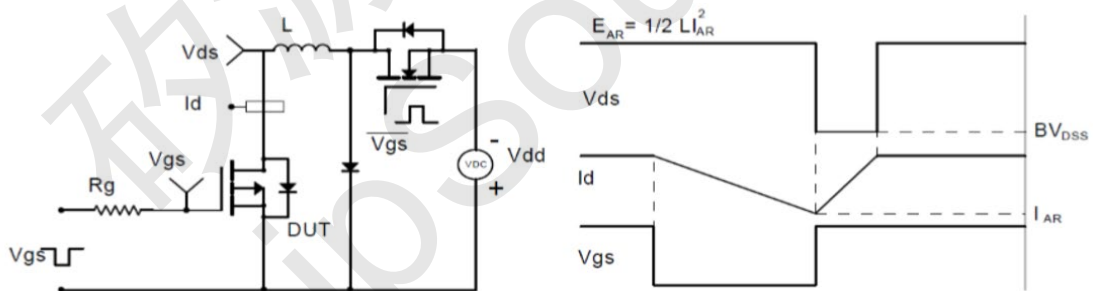


Figure 3: Unclamped Inductive Switching Test Circuit & Waveform


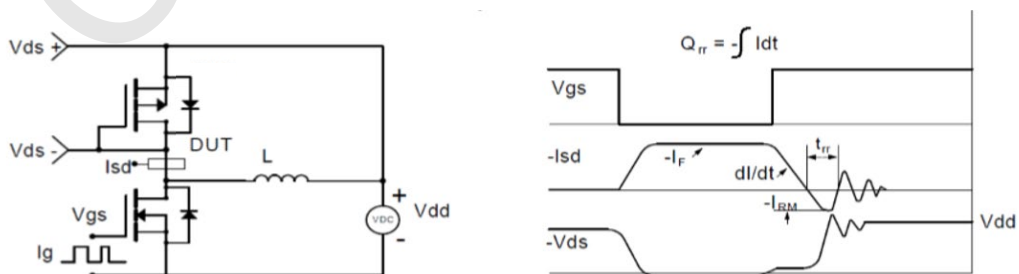


Figure 4: Diode Recovery Test Circuit & Waveform



CST3401 Package Mechanical Data-SOT-23

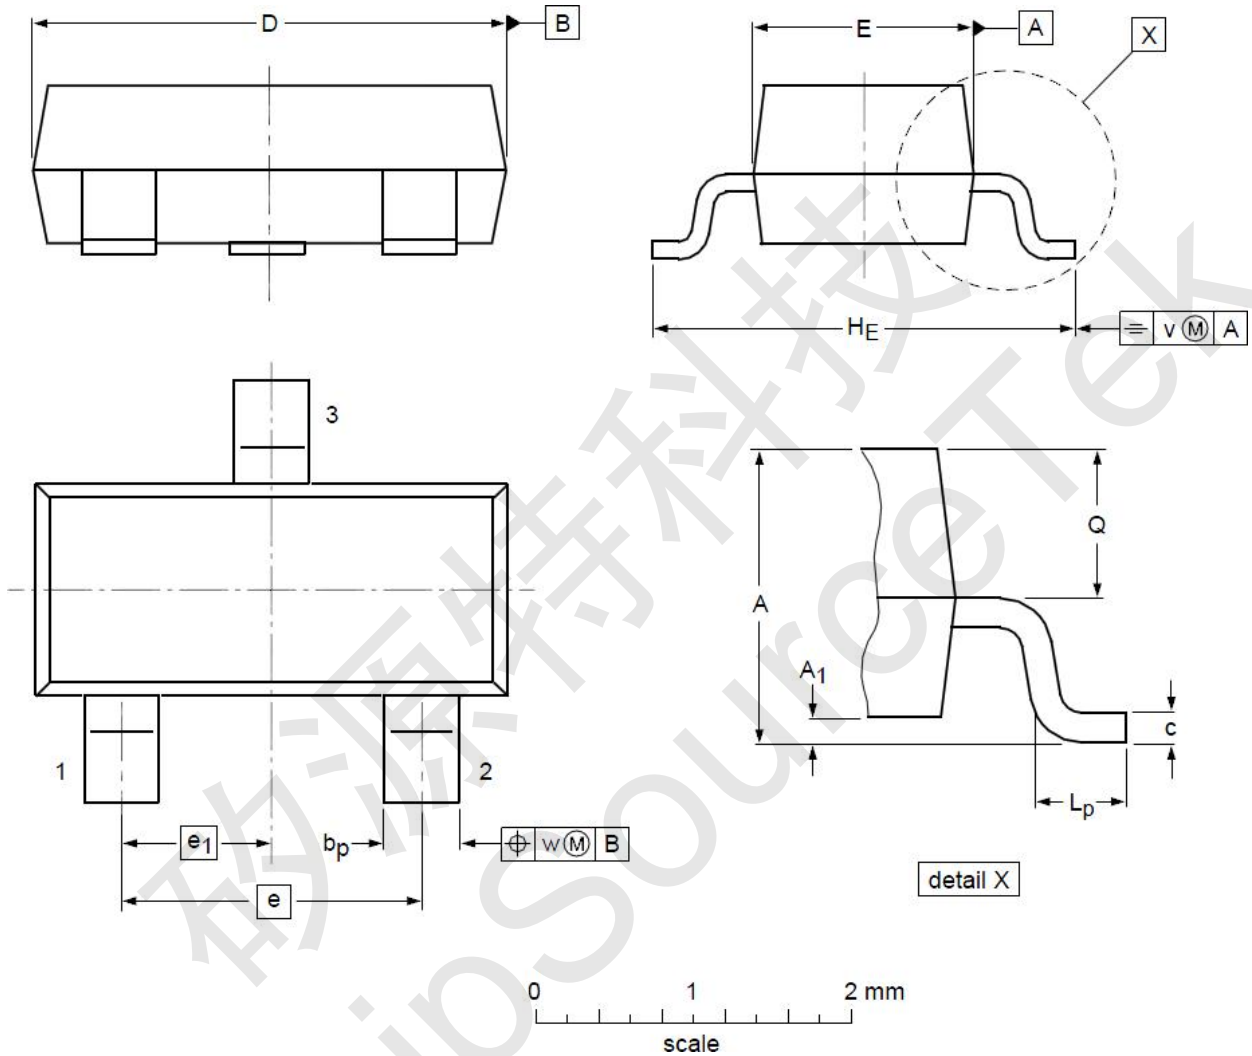

DIMENSIONS (unit : mm)

Symbol	Min	Typ	Max	Symbol	Min	Typ	Max
A	0.90	1.01	1.15	A ₁	0.01	0.05	0.10
b _p	0.30	0.42	0.50	c	0.08	0.13	0.15
D	2.80	2.92	3.00	E	1.20	1.33	1.40
e	--	1.90	--	e ₁	--	0.95	--
H _E	2.25	2.40	2.55	L _p	0.30	0.42	0.50
Q	0.45	0.49	0.55	v	--	0.20	--
w	--	0.10	--				