



CST9926B Dual N-Ch 20V Fast Switching MOSFETs



- ★ Green Device Available
- ★ Super Low Gate Charge
- ★ Excellent CdV/dt effect decline
- ★ Advanced high cell density Trench technology



CST9926B Product Summary

BVDSS	RDSON	ID
20V	43 mΩ	4.0 A

CST9926B SOP8 Pin Configuration



CST9926B Description

The CST9926B is the high cell density trenched N-ch MOSFETs, which provides excellent RDSON and efficiency for most of the small power switching and load switch applications.

The CST9926B meet the RoHS and Green Product requirement with full function reliability approved.

CST9926B Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	20	V
V_{GS}	Gate-Source Voltage	± 12	V
$I_D @ T_A=25^\circ C$	Continuous Drain Current, $V_{GS} @ 10V^1$	4.0	A
$I_D @ T_A=70^\circ C$	Continuous Drain Current, $V_{GS} @ 10V^1$	2.0	A
I_{DM}	Pulsed Drain Current ²	12	A
$P_D @ T_A=25^\circ C$	Total Power Dissipation ³	1.2	W
T_{STG}	Storage Temperature Range	-55 to 150	°C
T_J	Operating Junction Temperature Range	-55 to 150	°C

CST9926B Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-ambient ¹	---	92	°C/W
$R_{\theta JC}$	Thermal Resistance Junction-Case ¹	---	---	°C/W



深圳市矽源特科技有限公司

ShenZhen ChipSoureTek Technology Co.,Ltd.

CST9926B Dual N-Ch 20V Fast Switching MOSFETs

CST9926B Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
Off Characteristic						
$V_{(\text{BR})\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{GS}=0\text{V}, I_D=250\mu\text{A}$	20	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=20\text{V}, V_{GS}=0\text{V}$,	-	-	1.0	μA
I_{GSS}	Gate to Body Leakage Current	$V_{DS}=0\text{V}, V_{GS}=\pm 12\text{V}$	-	-	± 100	nA
On Characteristics						
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	0.4	0.7	1.0	V
$R_{DS(\text{on})}$ note2	Static Drain-Source on-Resistance	$V_{GS}=4.5\text{V}, I_D=3\text{A}$	-	43	55	$\text{m}\Omega$
		$V_{GS}=2.5\text{V}, I_D=2\text{A}$	-	62	85	
Dynamic Characteristics						
C_{iss}	Input Capacitance	$V_{DS}=10\text{V}, V_{GS}=0\text{V}, f=1.0\text{MHz}$	-	184	-	pF
C_{oss}	Output Capacitance		-	38	-	pF
C_{rss}	Reverse Transfer Capacitance		-	28	-	pF
Q_g	Total Gate Charge	$V_{DS}=10\text{V}, I_D=3\text{A}, V_{GS}=4.5\text{V}$	-	2.7	-	nC
Q_{gs}	Gate-Source Charge		-	0.4	-	nC
Q_{gd}	Gate-Drain("Miller") Charge		-	0.5	-	nC
Switching Characteristics						
$t_{d(on)}$	Turn-on Delay Time	$V_{DS}=10\text{V}, I_D=3\text{A}, R_{\text{GEN}}=3\Omega, V_{GS}=4.5\text{V}$	-	8	-	ns
t_r	Turn-on Rise Time		-	27	-	ns
$t_{d(off)}$	Turn-off Delay Time		-	26	-	ns
t_f	Turn-off Fall Time		-	33	-	ns
Drain-Source Diode Characteristics and Maximum Ratings						
I_S	Maximum Continuous Drain to Source Diode Forward Current		-	-	4.5	A
I_{SM}	Maximum Pulsed Drain to Source Diode Forward Current		-	-	12	A
V_{SD}	Drain to Source Diode Forward Voltage	$V_{GS}=0\text{V}, I_S=3\text{A}$	-	-	1.2	V

Notes:1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature

2. Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 0.5\%$



CST9926B Dual N-Ch 20V Fast Switching MOSFETs

CST9926B Typical Performance Characteristics

Figure1: Output Characteristics

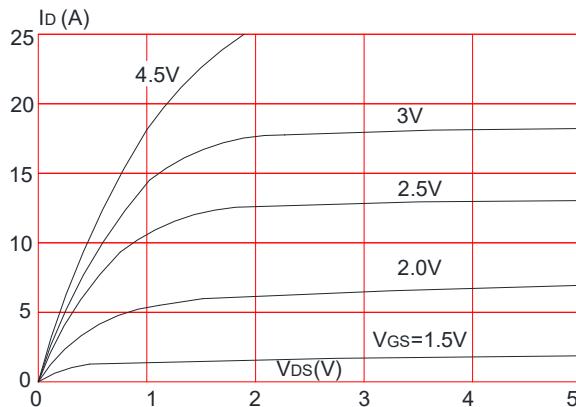


Figure 2: Typical Transfer Characteristics

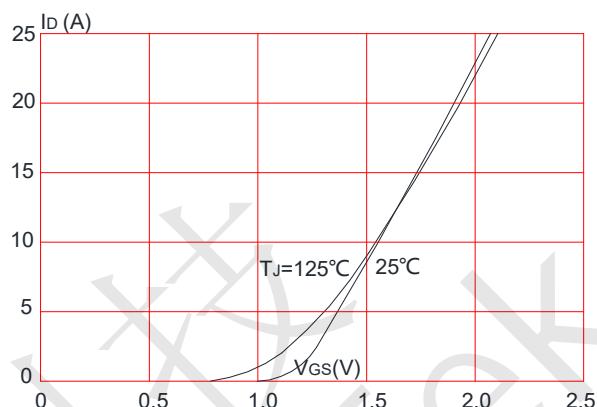


Figure 3: On-resistance vs. Drain Current

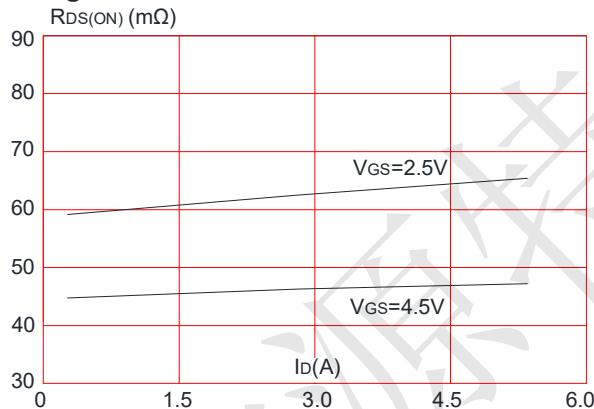


Figure 4: Body Diode Characteristics

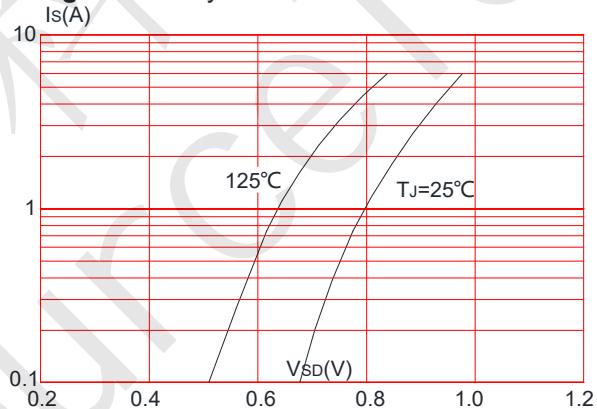


Figure 5: Gate Charge Characteristics


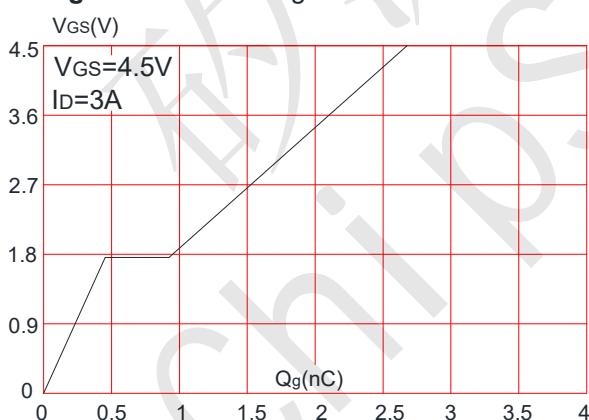


Figure 6: Capacitance Characteristics



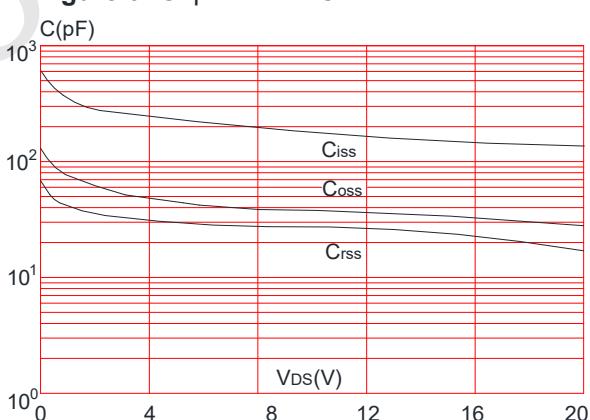

CST9926B Dual N-Ch 20V Fast Switching MOSFETs

Figure 7: Normalized Breakdown Voltage vs. Junction Temperature

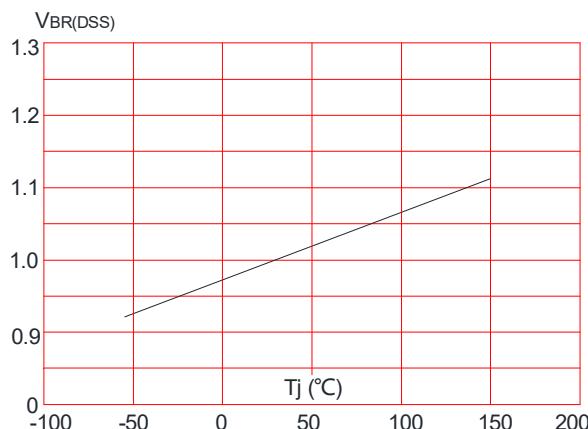


Figure 9: Maximum Safe Operating Area

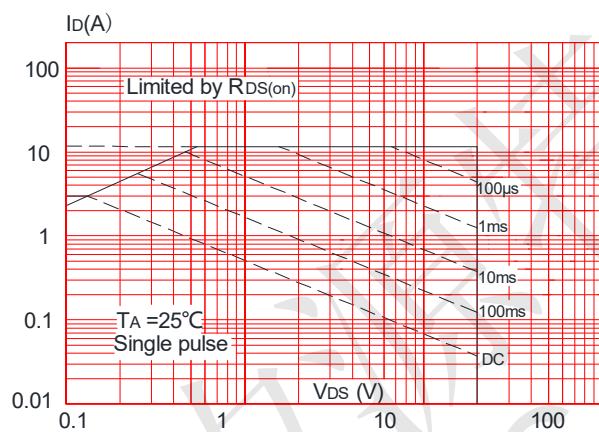


Figure 11: Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

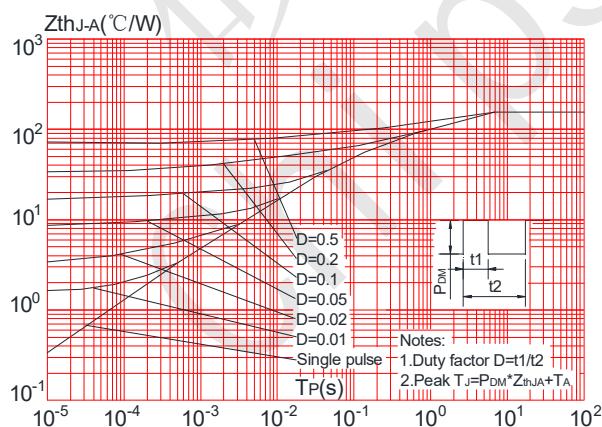


Figure 8: Normalized on Resistance vs. Junction Temperature



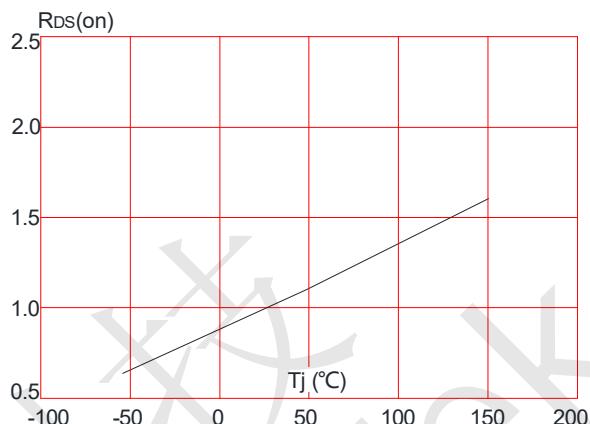


Figure 10: Maximum Continuous Drain Current vs. Ambient Temperature



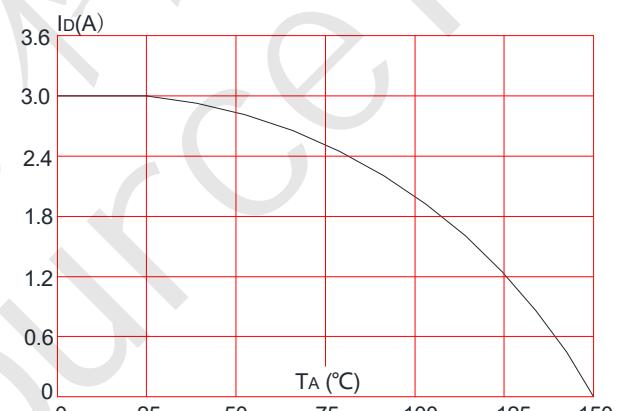

CST9926B Package Mechanical Data-SOP-8

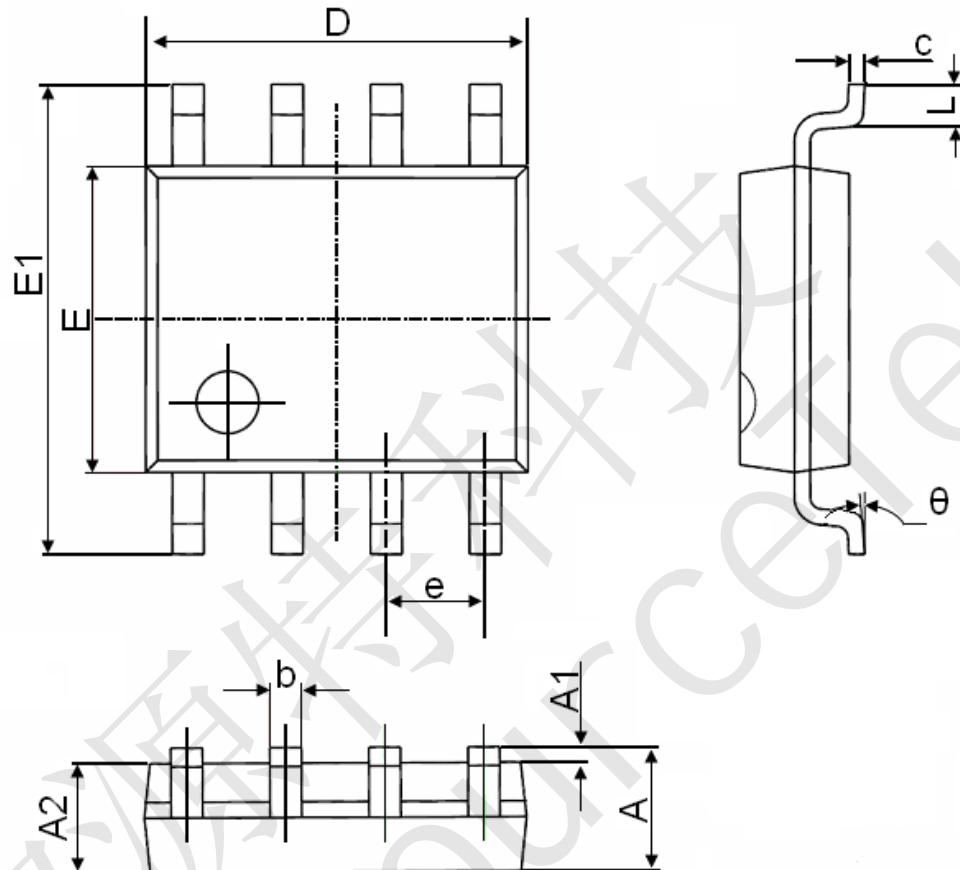

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°