



## N-Channel Enhancement Mode Power MOSFET

### Description

The PED645K uses advanced trench technology to provide excellent  $R_{DS(ON)}$  and low gate charge. It can be used in a wide variety of applications. It is ESD protected.

### General Features

- $V_{DS} = 18V$ ,  $I_D = 10A$

$R_{DS(ON)} < 6.5m\Omega @ V_{GS}=4.5V$

$R_{DS(ON)} < 7m\Omega @ V_{GS}=3.8V$


$R_{DS(ON)} < 8.5m\Omega @ V_{GS}=2.5V$

ESD Rating: 2000V HBM


- High Power and current handing capability
- Lead free product is acquired
- Surface Mount Package

### Application


- PWM applications
- Load switch
- Power management
- Battery protection

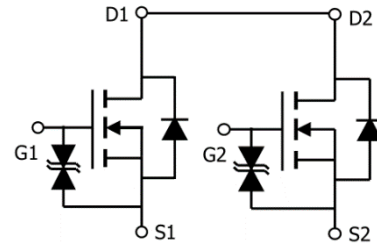

Schematic diagram

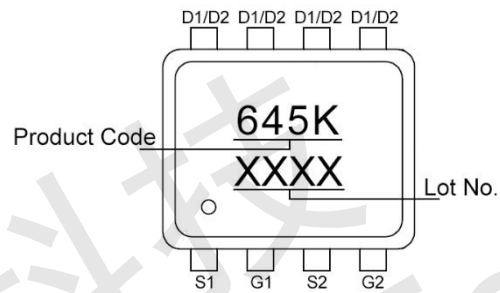

Marking and pin assignment

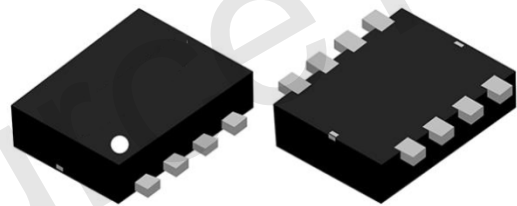

DFN3x3-8L

### Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	$V_{DS}$	18	V
Gate-Source Voltage	$V_{GS}$	$\pm 12$	V
Drain Current-Continuous	$I_D$	10	A
Drain Current-Continuous (TA=70°C )	$I_D$	8	A
Pulsed Drain Current (Note 1)	$I_{DM}$	40	A
Maximum Power Dissipation	$P_D$	2	W
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 To 150	°C

### Thermal Characteristic

Thermal Resistance, Junction-to-Ambient (Note 2)	$R_{\theta JA}$	62.5	°C/W
--	-----------------	------	------



**Electrical Characteristics (TA=25°C unless otherwise noted)**


Parameter	Symbol	Condition	Min	Typ	Max	Unit
<b>Off Characteristics</b>						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS}=0V, I_D=250\mu A$	18	-	-	V
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS}=16V, V_{GS}=0V$	-	-	1	$\mu A$
Gate-Body Leakage Current	$I_{GSS}$	$V_{GS}=\pm 10V, V_{DS}=0V$	-	-	$\pm 10$	$\mu A$
<b>On Characteristics (Note 3)</b>						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	0.45	0.65	1.0	V
Drain-Source On-State Resistance	$R_{DS(on)}$	$V_{GS}=4.5V, I_D=6A$	4	5	6.5	m $\Omega$
		$V_{GS}=3.8V, I_D=5.5A$	4.5	5.2	7	m $\Omega$
		$V_{GS}=2.5V, I_D=5.5A$	5	5.9	8.5	m $\Omega$
Forward Transconductance	$g_{FS}$	$V_{DS}=5V, I_D=7A$	-	70	-	S
<b>Dynamic Characteristics (Note 4)</b>						
Input Capacitance	$C_{iss}$	$V_{DS}=10V, V_{GS}=0V,$ $F=1.0MHz$	-	1920	-	pF
Output Capacitance	$C_{oss}$		-	295	-	pF
Reverse Transfer Capacitance (Note 4)	$C_{rss}$		-	285	-	pF
<b>Switching Characteristics</b>						
Turn-on Delay Time	$t_{d(on)}$	$V_{DD}=10V, R_L=1.35\Omega,$ $V_{GS}=5V, R_G=3\Omega$	-	2.5	-	nS
Turn-on Rise Time	$t_r$		-	7.2	-	nS
Turn-Off Delay Time	$t_{d(off)}$		-	4.5	-	nS
Turn-Off Fall Time	$t_f$		-	10.8	-	nS
Total Gate Charge	$Q_g$	$V_{DS}=10V, I_D=7A,$ $V_{GS}=4.5V$	-	17.5	-	nC
Gate-Source Charge	$Q_{gs}$		-	4.5	-	nC
Gate-Drain Charge	$Q_{gd}$		-	7	-	nC
<b>Drain-Source Diode Characteristics</b>						
Diode Forward Voltage (Note 3)	$V_{SD}$	$V_{GS}=0V, I_S=1A$	-	-	1.2	V

**Notes:**


1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board,  $t \leq 10$  sec.
3. Pulse Test: Pulse Width  $\leq 300\mu s$ , Duty Cycle  $\leq 2\%$ .
4. Guaranteed by design, not subject to product.




**Typical Electrical and Thermal Characteristics**

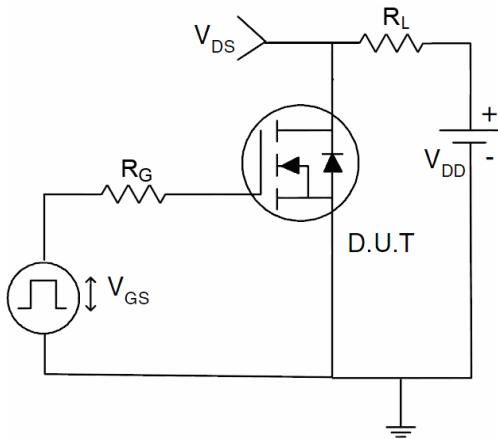


**Figure 1 Switching Test Circuit**

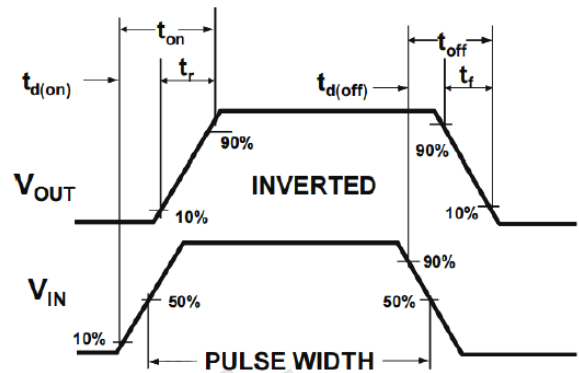


**Figure 2 Switching Waveform**

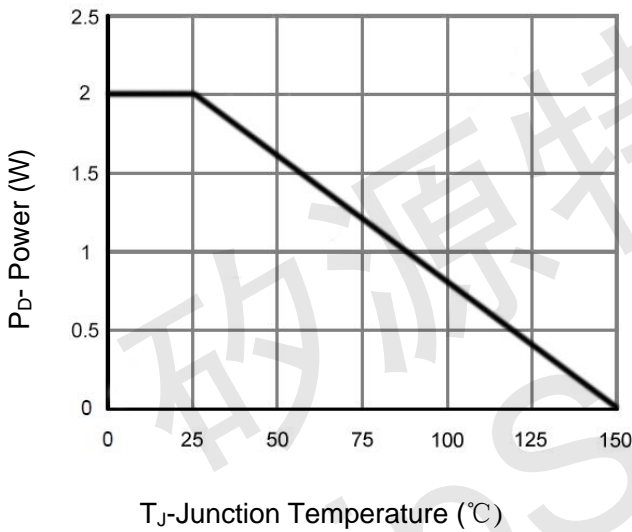


**Figure 3 Power Dissipation**

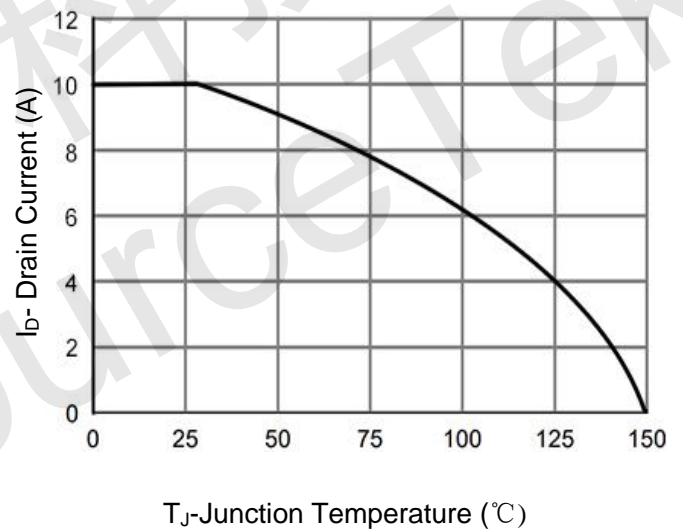


**Figure 4 Drain Current**

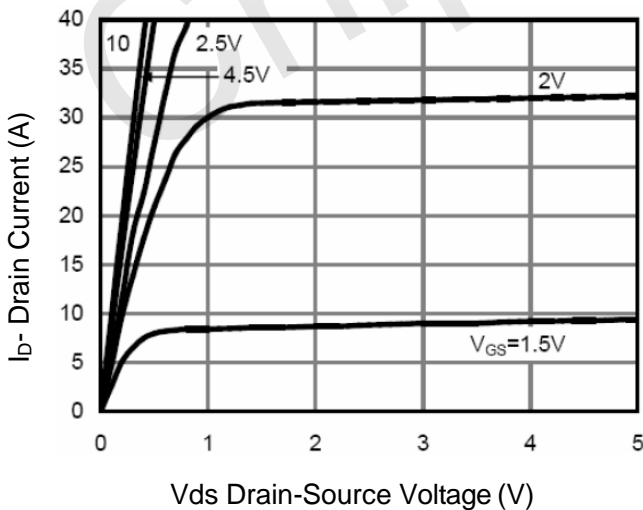


**Figure 5 Output Characteristics**

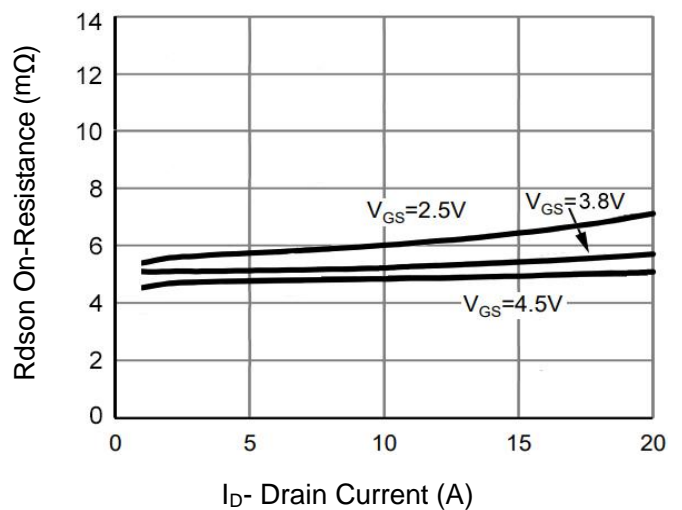


**Figure 6 R<sub>dson</sub> vs Drain Current**

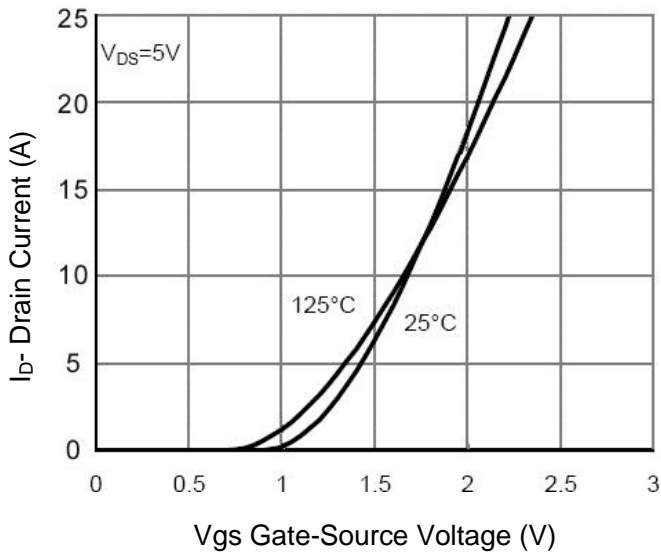


Vgs Gate-Source Voltage (V)  
**Figure 7 Transfer Characteristics**

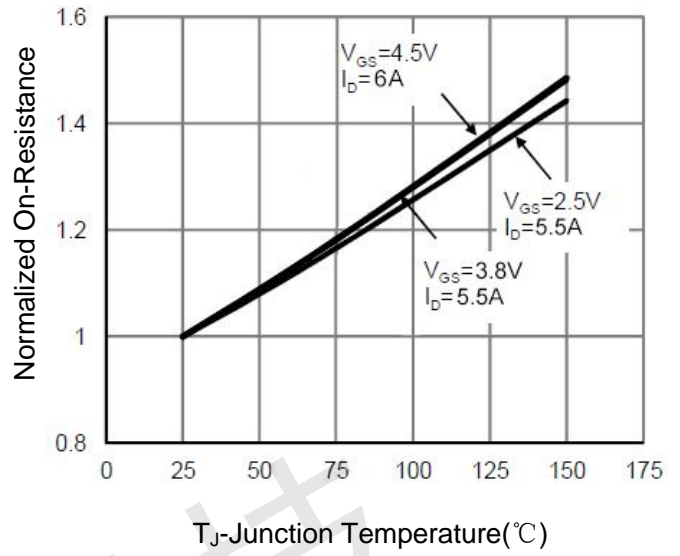


$T_J$ -Junction Temperature( $^\circ C$ )  
**Figure 8 Rdson vs Junction Temperature**

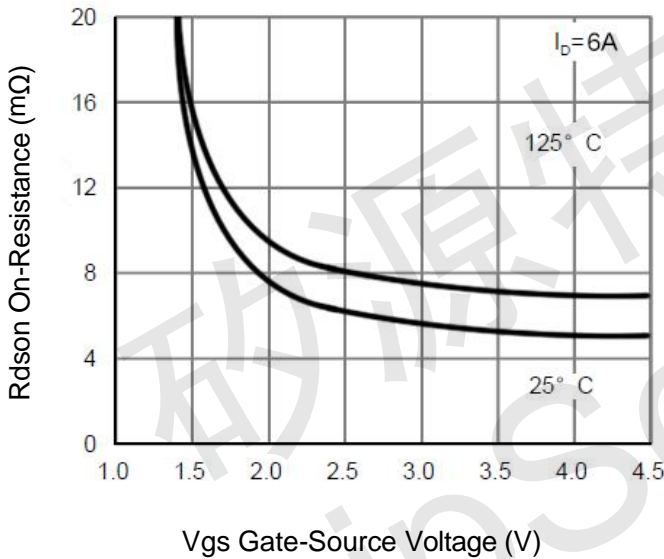


Vgs Gate-Source Voltage (V)  
**Figure 9 Rdson vs Vgs**

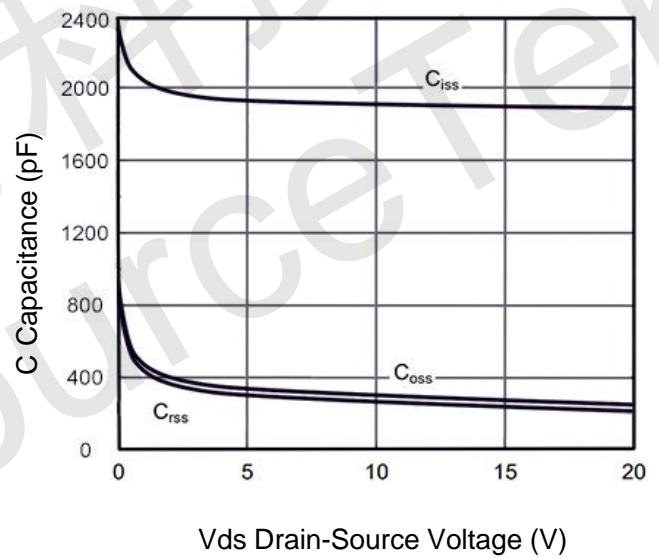


Vds Drain-Source Voltage (V)  
**Figure 10 Capacitance vs Vds**

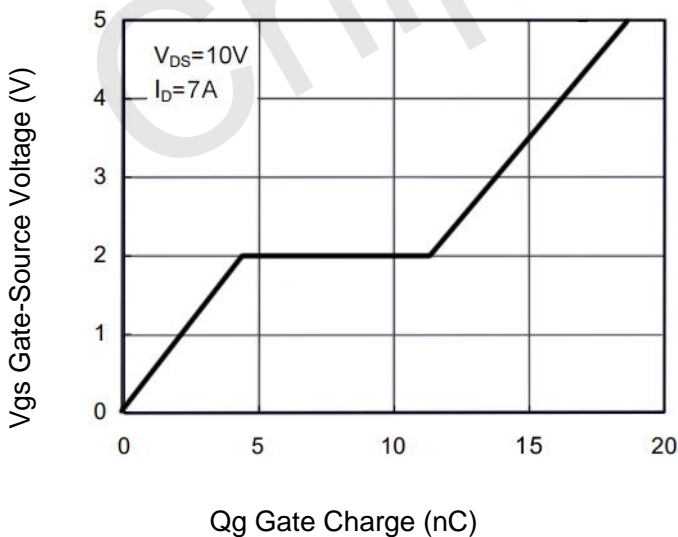


Qg Gate Charge (nC)  
**Figure 11 Gate Charge**

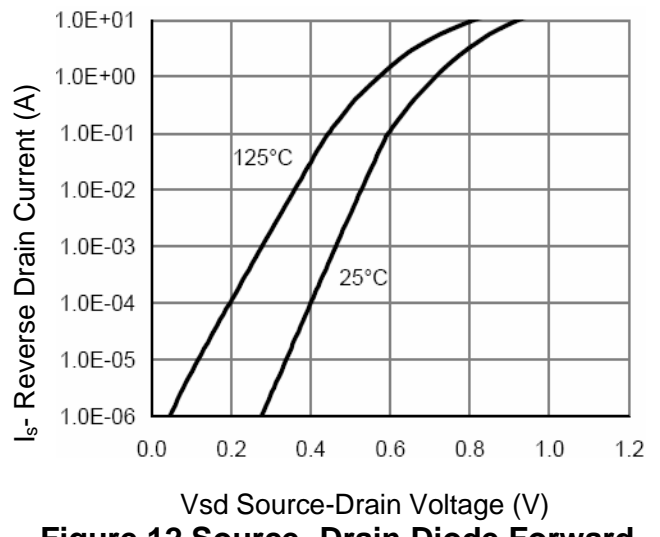

Vsd Source-Drain Voltage (V)  
**Figure 12 Source- Drain Diode Forward**

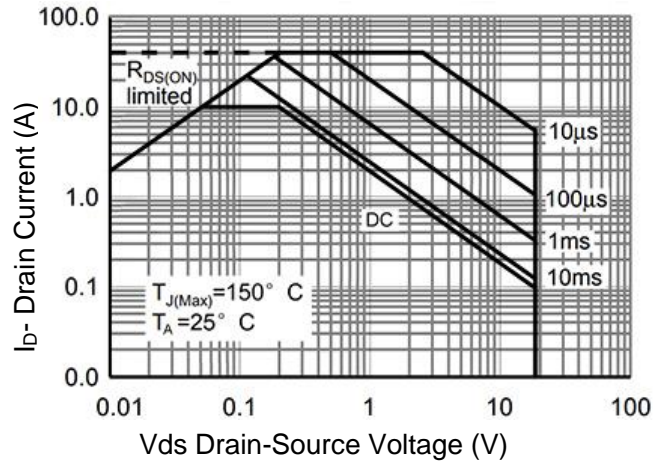

**Figure 13 Safe Operation Area**

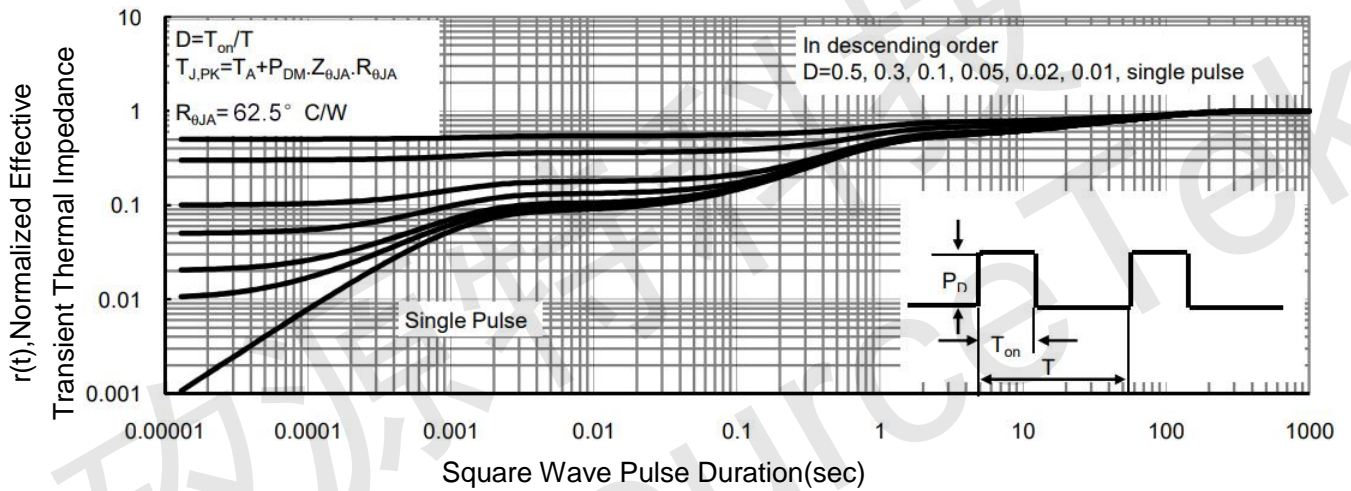


**Figure 14 Normalized Maximum Transient Thermal Impedance**





**DFN3x3-8L Package Information**

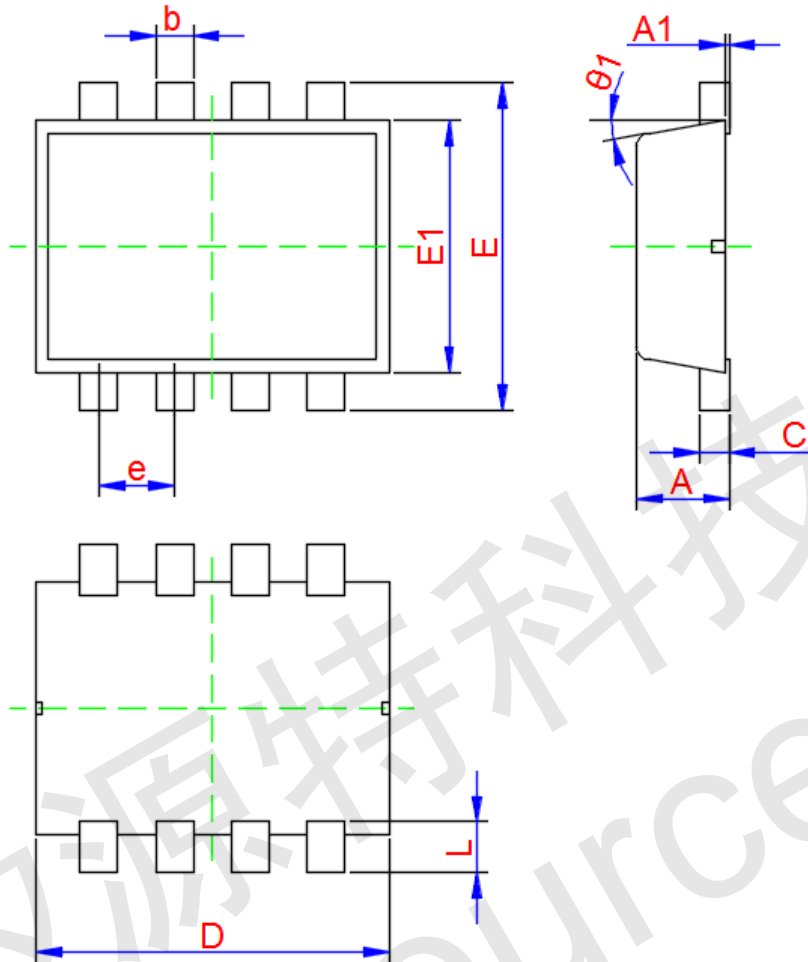

Symbol	Dimensions In Millimeters		
	Min.	Typ.	Max.
A	0.700	0.800	0.900
A1	0.000	-	0.050
b	0.240	0.300	0.350
c	0.080	0.150	0.250
D	2.800	2.900	3.000
E	2.700	2.800	2.900
E1	2.200	2.300	2.400
e	0.650TYP.		
L	0.200	0.380	0.450
Θ1	0°	10°	12°